

Swing Check Valve


Series 8700-G - AWWA C508 - Clear Waterway

Resilient Seat - 300 psi - Grooved Ends



MATERIAL LIST

DESCRIPTION	MATERIAL	ASTM SPECIFICATION
Body	Ductile Iron	A536 65-45-12
Disc	Stainless Steel/DI	AISI 304/A536 65-45-12
Disc Seat	EPDM	Commercial
Seat Ring	Bronze	ASTM B62
Spring	Stainless Steel	AISI 304
Hinge Pin	Stainless Steel	AISI 304
Side Plugs	Bronze	ASTM B62

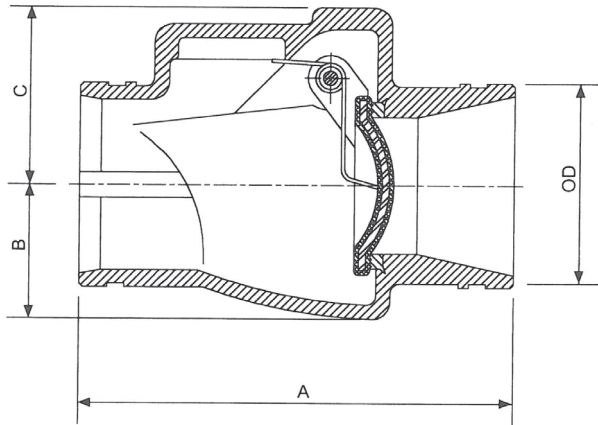

DIMENSIONAL DATA

Nominal Size	Part No.	A	B	C	OD
2"	8700-G-120	6.75	1.42	1.85	2.37
2-1/2"	8700-G-125	7.25	1.77	2.24	2.87
3"	8700-G-130	7.75	1.93	2.68	3.50
4"	8700-G-140	8.25	2.99	3.90	4.50
5"	8700-G-150	9.75	4.37	4.49	5.50
6"	8700-G-160	12.75	4.13	5.00	6.50
8"	8700-G-180	14.60	5.12	6.06	8.63
10"	8700-G-200	18.00	6.42	7.40	10.75
12"	8700-G-220	21.00	7.40	8.07	12.75

Dimensions in inches

Description:

1. Groove dimensions comply with AWWA C606 standard for steel pipes
2. Maximum Working Pressure: 300 psi
3. Working Temperature:
-10°C to 120°C for EPDM
4. Fusion Bonded Epoxy Coated, Interior and Exterior - AWWA C550
5. Two drain plugs

Form No. U0062

Note: Design and materials subject to change without notice.



United Water Products
 2113 W. 30th Street, Jacksonville, FL 32209
 TEL. 877-766-4459 FAX: 877-766-4458
 Website: www.unitedwaterproducts.com

1016